
Safety Guidelines




www.wieland-electric.com

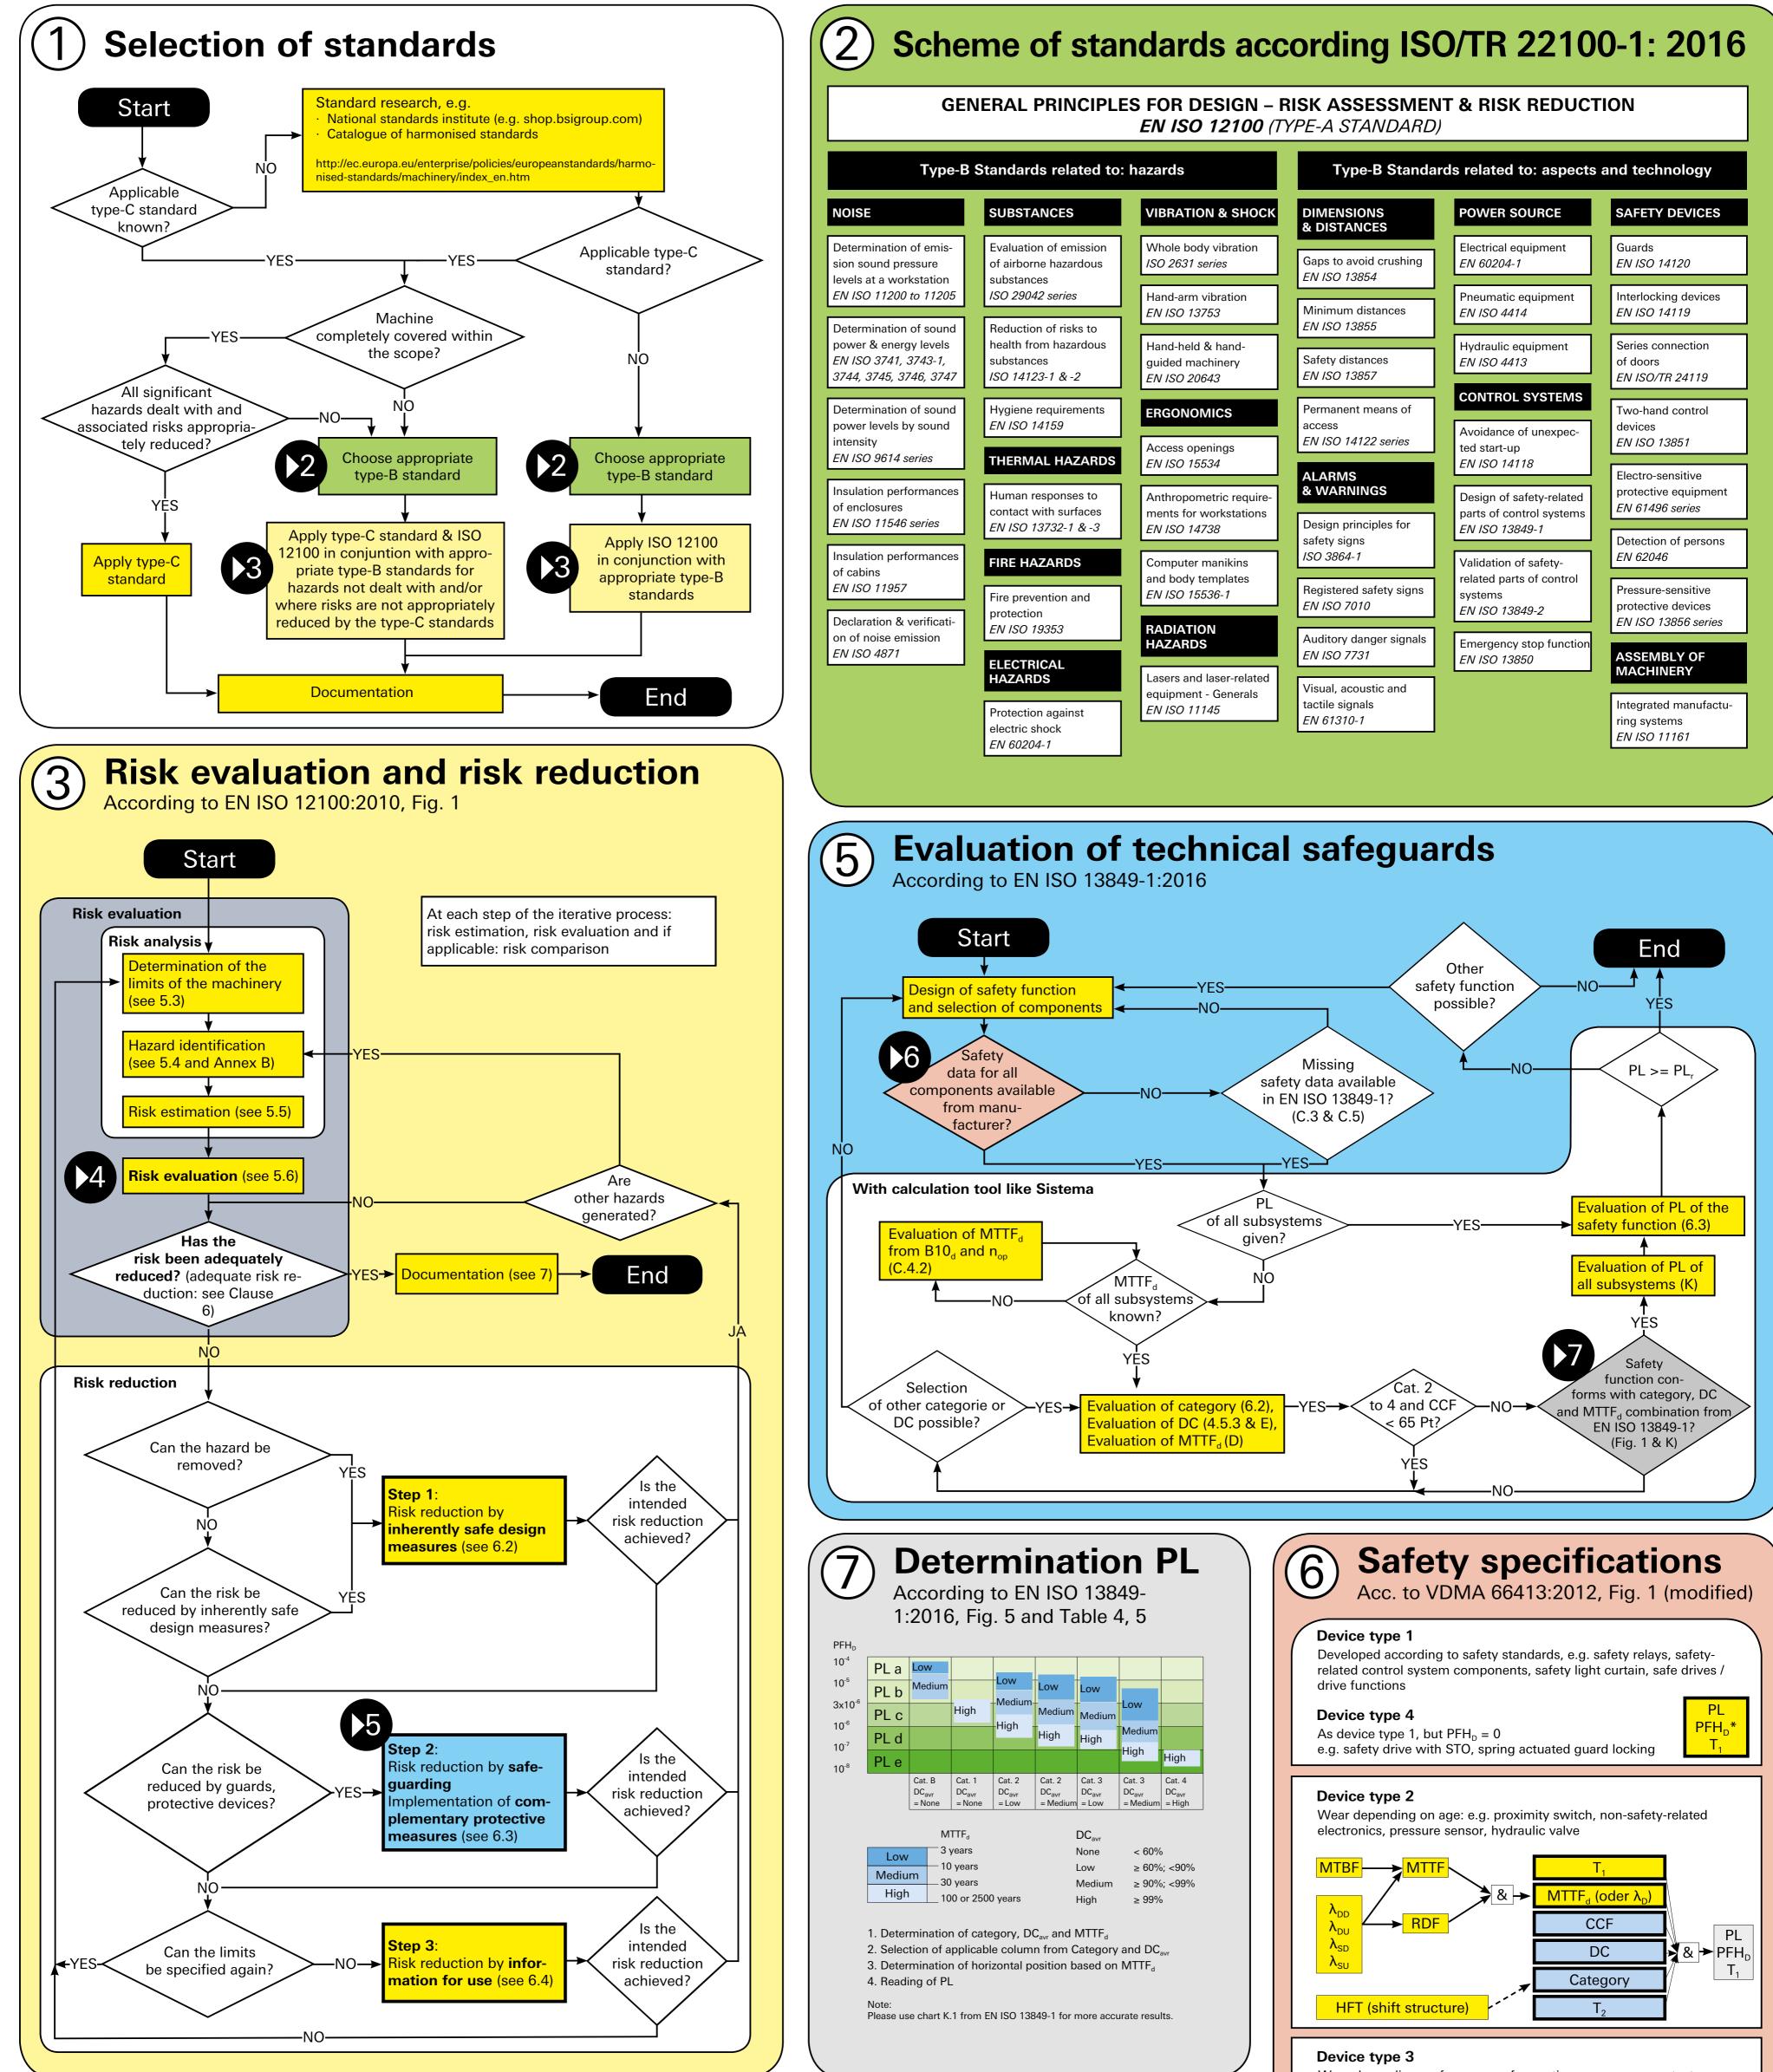


LOW	10 100000		000/ 000/	
Medium	— 10 years	Low	≥ 60%; <90%	
	— 30 years	Medium	≥ 90%; <99%	
High	100 or 2500 years	High	≥ 99%	
		riigii	2 00 /0	
1. Determination of category, DC _{ave} and MTTF _d				

safety service by Wieland

Wear depending on frequency of operation: e.g. power contactors, switches, pneumatic valves, interlocking devices

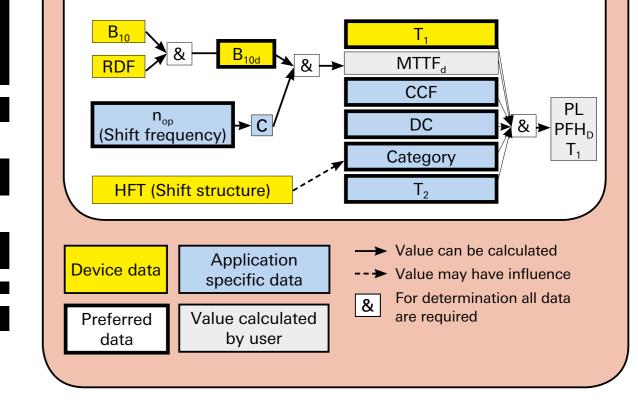





F1 infrequently up to less frequently and/or short period of exposure to hazard F2 frequently up to permanently and/or long period of exposure to hazard

P - Ways to avoid hazards or limitation of damage P1 possible under specific conditions P2 barely possible

Probability of occurrence of a hazardous event

The additional parameter, introduced with the ISO 13849-1:2016, is omitted here, as the standard provides no methods to justify it. For further infos, please contact our technical support.

Start -

4

Determination PL_r – Risk graph

According to EN ISO 13849-1:2016, Fig. A.1

S1 slight (normally reversible injury) S2 severe (normally irreversible injury including death)

F - Occurence and/or duration of exposure to hazard